



AENSI Journals

Journal of Applied Science and Agriculture

ISSN 1816-9112

Journal home page: www.aensiweb.com/JASA



An efficient Fuzzy Wavelet Neural Network (FWNN) based Trained Imperialist Competitive Algorithm (ICA) to control non Linear Industrial Processes

¹O. Rahmani, ²A. Taherkhani, ¹M. Rahmani, ¹T. Karimiyan, ³Mojtaba Behzad Fallahpour

¹Department of Electrical Engineering, Takestan Branch, Islamic Azad University, Takestan, Iran.

²Department of Physics, Faculty of Science, Takestan branch, Islamic Azad University, Takestan, Iran.

³Young Research Club, Lahijan Branch, Islamic Azad University, Lahijan, Iran.

ARTICLE INFO

Article history:

Received 11 June 2014

Received in revised form 25 July 2014

Accepted 20 September 2014

Available online 1 October 2014

Key words:

Fuzzy Wavelet Neural Network (FWNN), Trained Imperialist Competitive Algorithm (ICA), Non Linear CSTR

ABSTRACT

Among various controlling techniques, artificial intelligence based on controlling techniques is one of the paramount converted control methods and as a strong tool for controlling non linear control system has been specially noticed. The current essay presents a design of Fuzzy Wavelet Neural Network (FWNN) of Trained Imperialist Competitive Algorithm (ICA) to control non linear industrial process. This FWNN network is employed to approximate unknown kinetics of the given system as well as ICA algorithm that is used for training and optimization of FWNN parameters. In the suggested control design, the synthesis of neural control system in the closed loop control system is executed to provide the expedient control input. For this reason, the error among appropriate input and output of the system is used in order to control directly for regulation of network parameters. This controller is widely employed in industrial process of non linear Continuous Stirred- Tank Reactor (CSTR). The results of simulation indicate that the suggested FWNN-ICA controller gives apt dynamic response extraordinarily and it is well adapted to changes in the reference path and system parameters.

© 2014 AENSI Publisher All rights reserved.

To Cite This Article: O. Rahmani, A. Taherkhani, M. Rahmani, T. Karimiyan, Mojtaba Behzad Fallahpour., An efficient Fuzzy Wavelet Neural Network (FWNN) based Trained Imperialist Competitive Algorithm (ICA) to control non Linear Industrial Processes. *J. Appl. Sci. & Agric.*, 9(16): 88-94, 2014

INTRODUCTION

Fuzzy technology is an effective tool for dealing with complex, nonlinear processes characterizing with ill-defined and uncertainty factors. Fuzzy rules are based on expert knowledge. The constructing of knowledge base for some complicated processes is difficult. Thus, there are some methods for constructing of fuzzy rules (Yager, R.R. and L.A. Zadeh, 1994; Jang, S.R., *et al.*, 1997). On the other hand, some characteristics of neural networks such as learning ability, generalization, and nonlinear mapping are used to deal with signal processing, control system, decision making, and so on. However, the main problem of neural networks is that they require a large number of neurons to deal with the complex problems. Moreover, they also result in slow convergence and convergence to a local minimum. In order to overcome these disadvantages, wavelet technology is integrated into neural networks (Tang Tzeng, S., 2010).

Recently, based on the combination of feed-forward neural networks and wavelet decompositions, wavelet neural network (WNN) has received a lot of attention and has become a popular tool for function learning (Ho, D.W.C., *et al.*, 2001). The main characteristic of WNN is that some kinds of wavelet function are used as the nonlinear transformation in the hidden layer of neural network, so time–frequency property of wavelet is incorporated into the learning ability of neural networks.

However, the main problem of WNN with fixed wavelet bases is the selection of wavelet frames because the dilation and translation parameters of wavelet basis are fixed and only the weights are adjustable. The appropriate wavelet transform will result in the accuracy of approximation. Therefore, there are several different methods proposed to solve the problems (Zhang, Q., 1997; Chen, J., D.D. Bruns, 1995).

The complexity and uncertainty of the system can be also reduced and handled by the concepts of fuzzy logic. The local details of non stationary signals can be analyzed by wavelet transforms. The approximation accuracy of the plant can be improved by the self-learning capabilities of neural networks. Therefore, there are many papers that discuss the synthesis of a fuzzy wavelet neural inference system for signal processing, control

Corresponding Author: O. Rahmani, Department of Electrical Engineering, Takestan Branch, Islamic Azad University, Takestan, Iran.

problems, identification and pattern recognition (Tang Tzeng, S., 2010; Bijami, E., 2010; Abiyev, R.H., O. Kaynak, 2008).

In recent years, Fuzzy Wavelet Neural Networks (FWNN) have become very popular and have been applied in many scientific and engineering research areas such as system identification, function approximation and control of nonlinear systems. This is due to its information processing characteristics such as nonlinearity, high parallelism, fault tolerance as well as capability to generalize and handle imprecise information (Ho, D.W.C., 2001).

The Continuous Stirred Tank Reactor system (CSTR) is a complex nonlinear chemical system that one of its states, reaction consistence, cannot be measured. Anyway, the value of the state is necessary for control, so state estimation is used (Khodadadi, H., H. Jazayeri-Rad). In this paper, a FWNN combined with ICA (FWN-ICA) is used for identification and tracking control of a nonlinear continuous stirred tank reactor (CSTR). The FWN is employed to estimate the value of the state and unknown dynamic of system. FWNN consist of a set of fuzzy rules that each rule corresponding to a sub-WNN consists of single scaling wavelets. The difficulties of selecting wavelets are reduced and orthogonal least-square (OLS) algorithm is used to determine the number of fuzzy rules and to purify the wavelets for each rule. Also, ICA is used to train and optimize the FWNN parameters. In the proposed control scheme the error between desired system output and output of control object is directly utilized to tune the network parameters. The capability and efficiency of the proposed method is illustrated by the temperature control of a nonlinear CSTR.

The paper is organized as follows. To make a proper background, the basic concepts of FWN and ICA are briefly explained in section II. In section III, the proposed FWN- ICA based controller and its learning algorithm are described. Section IV described CSTR system. The results of the proposed approach on the simulation example are given in Section V and finally, some conclusions are dawn in Section VI.

2. Fuzzy Wavelet Network and Imperialist Competitive Algorithm:

The basic concepts of FWN and ICA are briefly described in this section.

2.1. Fuzzy Wavelet Neural Network:

A typical fuzzy wavelet neural network for approximating function y can be described by a set of fuzzy rules such as follow (Ho, D.W.C., 2001):

R_i : If x_1 is A_1^i and x_2 is A_2^i and ... and x_q is A_q^i ,

then

$$\hat{y}_i = \sum_{k=1}^{T_i} w_{M_i, t^k} \Psi_{M_i, t^k}^{(k)}(\underline{x}), \quad M_i \in z, t^k \in R^q, w_{M_i}^{t^k} \in R, x \in R^q \quad (1)$$

where R_i is the i th rule, c is the number of fuzzy rules. x_j and \hat{y}_i are j th input variable of \underline{x} and output of the local model for rule R_i , respectively. Also M_i is dilation parameter and T_i is the total number of wavelets for the i th rule. $t^k = [t_1^k, t_2^k, \dots, t_q^k]$, where t_j^k denotes the translation value of corresponding wavelet k . Finally, A_j^i is the fuzzy set characterized by the following Gaussian-type membership function.

$$A_j^i(x_j) = e^{-\frac{(x_j - p_{j1}^i)^2}{p_{j2}^i}}$$

$p_{j1}^i, p_{j2}^i \in R$ and $p_{j3}^i = 2$ where p_{j1}^i represents the center of membership function, p_{j2}^i and p_{j3}^i determine the width and the shape of membership function, respectively. Wavelets $\Psi_{M_i, t^k}^{(k)}(\underline{x})$ are expressed by the tensor product of 1-D

$$\text{wavelet functions: } \Psi_{M_i, t^k}^{(k)}(\underline{x}) = 2^{-\frac{M_i}{2}} \Psi^{(k)}(2^{M_i} \underline{x} - t^k) = \prod_{j=1}^q 2^{-\frac{M_i}{2}} \Psi^{(k)}(2^{M_i} x_j - t_j^k) \quad (3)$$

By applying fuzzy inference mechanism and let \hat{y}_i be the output of each sub-WNN, the output of FWN for function $y(\underline{x})$ is as follow:

$$\hat{y}_{FWN}(\underline{x}) = \sum_{i=1}^c \hat{\mu}_i(\underline{x}) \hat{y}_i$$

where $\hat{\mu}_i(\underline{x}) = \mu_i(\underline{x}) / \sum_{i=1}^c \mu_i(\underline{x})$, $\mu_i(\underline{x}) = \prod_{j=1}^q A_j^i(x_j)$ and for current input \underline{x} and each function, satisfies $0 \leq \hat{\mu}_i \leq 1$ and

$\sum_{i=1}^c \hat{\mu}_i = 1$. Also $\hat{\mu}_i(\underline{x})$ determines the contribution degree of the output of the wavelet based model with resolution level M_i .

A good initialization of wavelet neural networks leads to fast convergence. Numbers of methods are implemented for initializing wavelets, such as Orthogonal Least Square (OLS) procedure and clustering method (Kugarajah, T., Q. Zhang, 1995). In this paper the OLS algorithm is used to select important wavelets and to

determine the number of fuzzy rules and network dimension. More details about construction of FWNN and network parameter initialization can be found in (Ho, D.W.C., 2001). Also, details of OLS algorithm can be found in (Chen, S., 1991). The structure of applied FWNN is shown in Fig.1.

Furthermore, it is important to adjust the required network parameters in the design of dynamic systems. In order to avoid trial-and-error, a self-tuning process is used by employing the ICA to determine significant parameters such as dilation, translation, weights, and membership functions. In other words, during the learning process, these network parameters are optimized using ICA. To make a proper background, the concept of ICA is given in the next subsection.

2.2. Imperialist Competitive Algorithm:

Imperialist competitive algorithm (ICA) is a new evolutionary optimization algorithm inspired by the socio-political process of imperialistic competition. Compared with the conventional evolutionary optimization algorithms, ICA has proven its superior capabilities, such as faster convergence and better global minimum achievement (Biabangard-Oskouyi, A., 2009). Flowchart of the ICA is illustrated in Fig. 2.

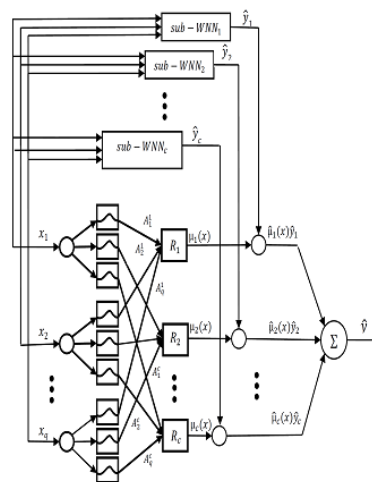


Fig. 1: Structure of FWNN (Ho, D.W.C., 2001).

Similar to other evolutionary algorithms, this algorithm begins with an initial population. Each individual of the population is called a country. Some of the best countries (countries with the best fitness value) are selected to be the imperialist states and the rest form the colonies of these imperialists. Based on the imperialists' power, each country is distributed to their states. The power of an empire is proportional to its fitness value.

After creating initial empires, their colonies begin moving toward the relevant imperialist country. This movement is a simple model of assimilation policy that was pursued by some imperialist states (Atashpaz-Gargari, E. and C. Lucas, 2007). Fig. 3 shows the movement of a colony towards the imperialist.

In this movement, θ and x are random numbers with uniform distribution as shown in (5), (6) and d is the distance between colony and the imperialist.

$$\begin{aligned} x &\sim U(0, \lambda \times d) \\ \theta &\sim U(-\gamma, \gamma) \end{aligned} \quad (5)$$

where λ and γ are arbitrary numbers that modify the area that colonies randomly search around the imperialist.

The power of an imperialist country and its colonies represents the total power of an empire. In this algorithm, the total power of an empire is calculated by the power of imperialist state plus a percentage of the mean power of its colonies. In imperialistic competition, every empire tries to take possession of colonies of other empires and control them. As a result, a gradually decrease in the power of weaker empires and therefore increase in the power of more powerful ones will happen.

This competition is done by picking some (usually one) of the weakest colonies of the weakest empires and making a competition among all empires to possess them (that) colonies. In this competition, each of empires will have a likelihood of taking possession of the mentioned colonies, based on their total power. The more powerful an empire, the more likely it will possess these colonies. In other words, the possession probability of the colonies depends on the power of the empires trying to possess them. Any empire that is not able to succeed in imperialist competition and cannot increase its power (or at least prevent decreasing its power) will be eliminated. The imperialistic competition will gradually result in an increase in the power of great empires and a

decrease in the power of weaker ones. The power of weak empires will gradually loose and ultimately they will collapse.

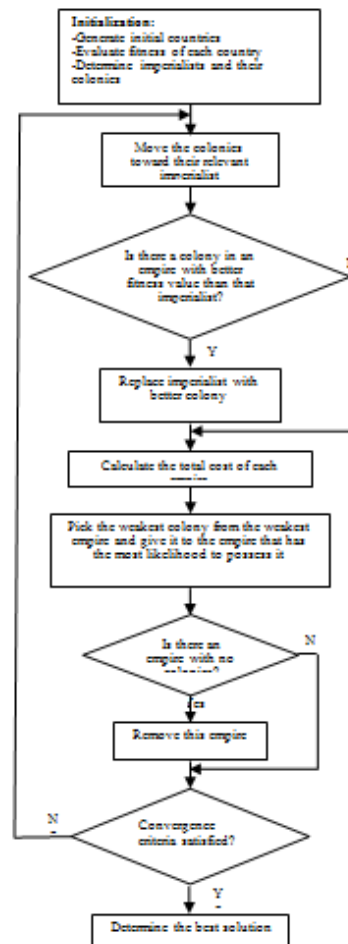


Fig. 2: General principle of the ICA.

The above procedures cause that all the countries converge to a state in which there exist just one empire in the world and all the other countries are its colonies.




Fig. 3: Motion of colonies toward their relevant imperialist.

3. Proposed Control Scheme:

The FWNN and its learning algorithm are used for identification and control of nonlinear CSTR system. Following, the architecture of proposed control strategy and its optimization method based on ICA are described in subsections A and B, respectively.

3.1. Architecture of Proposed FWNN-ICA controller:

The structure of control system is given in Fig. 4. As can be seen, in this diagram FWNN is utilized as a controller and identifier.

The control scheme consists of the FWNN plant model, FWNN controller and the optimization block. Where $r(t)$ is desired output and $y(t)$ is the output of control system. In the proposed control strategy, neural control system synthesis is performed in the closed-loop control system and $e(t)$ is used for tuning network weights to provide appropriate control input. By minimizing a quadratic measure of the error between desired

system output and the output of control object, i.e. $e(t)$, the design problem can be characterized by the ICA formulation. On the other hand, the ICA is used to correct the network parameters for adjusting of FWNN controller and identifier in real time operation.




Fig. 4: Proposed FWNN-ICA control scheme.

3.2. FWNN Training:

In the learning step, the FWNN parameters are calculated by minimizing a fitness function that using the difference between the desired and real output as follow:

$$E_k = \sum_{l=1}^H |\hat{y}_{RNN_k}(x(l)) - y(l)|^2 \tag{7}$$

and, the K th country is represented as

$$F_N = [p_{j1}^{iN} p_{j2}^{iN} t^{kN} w_{M_i}^N]$$

which are all free design parameters that to be updated by ICA in our FWNN model. H is number of network training data. According to Fig. 1, the output is measured in each iteration and will be given to the ICA optimizer after being compared to the reference. Then the solution vector is obtained by ICA by minimizing the fitness function which gives the FWNN parameters. By using the obtained parameters, the network output is calculated and applied to system followed by calculating the new output. The procedure continues until a termination criterion is met. The termination criterion could be the number of iterations, or when a solution of minimal fitness is found.

Equation (8) shows that the free parameters to be trained in FWNN are $[p_{j1}^{iN} p_{j2}^{iN} t^{kN} w_{M_i}^N]$. Our task is to design the FWNN structure such that the error between output and reference is minimized. Therefore ICA is applied for tuning parameters of FWNN by optimizing the (7) objective or cost function. Where E_N is the fitness of N th chromosome. In the ICA, each population is a solution to the problem which determines the parameters of FWNN, i.e. $[p_{j1}^{iN} p_{j2}^{iN} t^{kN} w_{M_i}^N]$.

4. The Continuous Stirred Tank Reactor system

Continuous stirred tank reactor (CSTR) is a highly nonlinear process. A schematic of the CSTR system is shown in Fig.5. The process model consists of two nonlinear ordinary differential equations (Nikravesh, M., 2000):

$$\begin{aligned} \frac{dC_A}{dt} &= \frac{Q}{V}(C_{Af} - C_A) - k_0 \exp\left(\frac{-E_a}{RT}\right)C_A \\ \frac{dT}{dt} &= \frac{Q}{V}(T_f - T) - \frac{H_f}{\rho_c V} k_0 \exp\left(\frac{-E_a}{RT}\right)C_A + \frac{UA}{\rho_c V}(T_j - T) \\ \frac{dT_j}{dt} &= -\frac{UA}{\rho_c V_j}(T - T_j) + \frac{u}{V_j}(T_{jf} - T_j) \end{aligned} \tag{9}$$

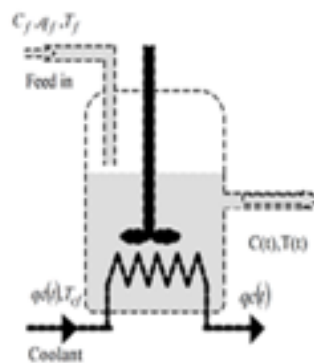


Fig. 5: CSTR plant model.

where the $x = [x_1; x_2; x_3]$ state-variables of the model are the CA (mol/m³) concentration of the A component in the reactor, the T (oC) reactor temperature, and the T_j (oC) temperature of the jacket of the reactor, while the input of the process is the u [m³/min] flow rate of the cooling material. The controlled output y of the process is the reactor temperature, $y = x_2$. The parameters and its nominal values of the model are given in Table 1. Details of the system data and its properties are given in (Madar, J., *et al.*, 2005).

5. Simulation Study:

In the first stage, we should generate input-output data for obtaining the FWNN model of the process (Fig. 4). The training data was generated by closed-loop experiment and the proposed approach in section III is used to train the model. Fig. 6 shows the obtained training data set.

The combined servo and regulatory control problem was defined between two unstable operating points: 70 0C - 80 0C. The coolant feed temperature changed from 10 0C to 20 0C at $t = 10$ h what was the unmeasured disturbance. In the ICA, each country represents a candidate solution for the problem. In the initialization step, a set of countries are generated randomly where n is set to be 200. The numbers of *imperialist states* is set to be 20 and thus, 180 *colonies* will be existed. Based on the author's previous experience λ and γ are set to 2 and 0.5 (radian), respectively. The number of iterations is considered to be 200, which is the stopping criteria used in other methods available in the literature. Fig. 7 shows the model's output and the real output. From Fig. 7 can see that performances of the controllers are good, and the FWNN controller based on ICA achieved good dynamic performance.

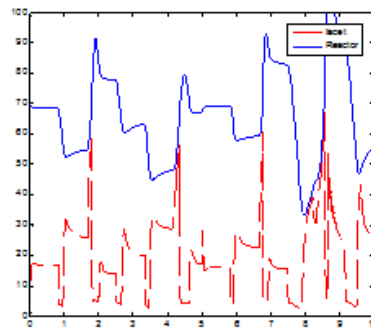


Fig. 6: Training date.

Table 1: Nominal values of the model parameters.

Notation	Description	Value and unit
Q	Feed flowrate	0.2 m ³ /min
V	Reactor volume	2 m ³
K_0	Reaction rate coefficient	$3.5 \cdot 10^6$ l/min
E_a	Activation energy	49.884 kJ/mol
R	Ideal gas constant	$8.314 \cdot 10^{-3}$ kJ/mol °C
H_r	Heat of reaction	500 kJ/mol
C_{Af}	Concentration of A in feed	1000 mol/m ³
T_f	Feed temperature	30 °C
ρ	Density of solution	1000 kg/m ³
c_p	Heat capacity of solution	4.2 kJ/kg °C
UA	Heat transfer coefficient	252 kJ/min °C
V_j	Jacket volume	0.4 m ³
T_{jf}	Inlet temperature of coolant	10 °C

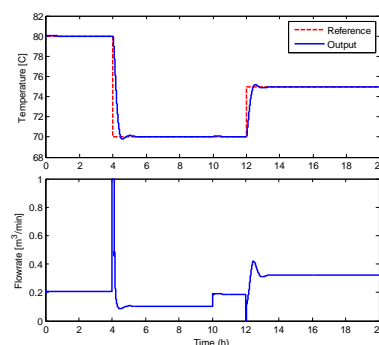


Fig. 7: Model's output and real output.

Conclusion:

This paper presented the development and evaluation of an FWNN based ICA controller. The controller was designed to control the temperature of a CSTR. The nonlinear plant identification was done on-line using the ICA for quick learning. With this method any changes in the parameters of the system could be detected and remedial functions can be done. Simulation results show good dynamic performance of the proposed FWNN-ICA controller.

REFERENCES

- Yager, R.R. and L.A. Zadeh, 1994. Eds., *Fuzzy Sets, Neural Networks and Soft Computing*. New York: Van Nostrand Reinhold.
- Jang, S.R., C.T. Sun and E. Mizutani, 1997. *Neuro-Fuzzy and Soft Computing*. Englewood Cliffs, NJ: Prentice-Hall, ch, 17.
- Tang Tzeng, S., 2010. Design of fuzzy wavelet neural networks using the GA approach for function approximation and system identification, *Fuzzy Sets and Systems*, 161: 2585-2596.
- Ho, D.W.C., P.A. Zhang, J. Xu, 2001. Fuzzy wavelet networks for function learning, *IEEE Transactions on Fuzzy Systems*, 9(1): 200-211.
- Zhang, Q., 1997. Using wavelet networks in nonparametric estimation, *IEEE Transactions on Neural Networks*, 8: 227-236.
- Chen, J., D.D. Bruns, 1995. WaveARX neural network development for system identification using a systematic design synthesis, *Industrial & Engineering Chemistry Research*, 34: 4420-4435.
- Bijami, E., M. Shahriari-kahkeshi, M. Zekri, 2010. Shuffled Frog Leaping Algorithm combined with Fuzzy Wavelet Neural Network for Function Learning, *The 4th International Conference on Intelligent Information Technology Application (IITA 2010)*.
- Abiyev, R.H., O. Kaynak, 2008. Fuzzy wavelet neural networks for identification and control of dynamic plants—a novel structure and a comparative study, *IEEE Transactions on Industrial Electronics*, 55(8): 3133-3140.
- Khodadadi, H., H. Jazayeri-Rad, “Applying a dual extended Kalman filter for the nonlinear state and parameter estimations of a continuous stirred tank reactor,” *Computers & Chemical Engineering*, In Press.
- Chen, S., C.F.N. Cowan, P.M. Grant, 1991. Orthogonal least squares learning algorithm for radial basis function networks, *IEEE Trans. Neural Networks*, 2.
- Kugarajah, T., Q. Zhang, 1995. Multidimensional wavelet frames. *IEEE Transaction on Neural Networks*, 6: 1552-1556.
- Biabangard-Oskouyi, A., E. Atashpaz-Gargari, N. Soltani and C. Lucas, 2009. “Application of Imperialist Competitive Algorithm for materials property characterization from sharp indentation test,” *International Journal of Engineering Simulation*, 10-1.
- Atashpaz-Gargari, E. and C. Lucas, 2007. Imperialist Competitive Algorithm: An algorithm for optimization inspired by imperialistic competition, *The proceeding of IEEE Congress Evolutionary Computation*, 4661-4667.
- Nikraves, M., A.E. Farrell, T.G. Stanford, 2000. “Control of nonisothermal CSTR with time varying parameters via dynamic neural network control (DNNC),” *Chemical Engineering Journal*, 76: 1-16.
- Madar, J., J. Abonyi, F. Szeifert, 2005. Feedback Linearizing Control Using Hybrid Neural Networks Identified by Sensitivity Approach, *Engineering Applications of Artificial Intelligence*, 18.
- Seryasat, O.R., M. Aliyari Shoorehdeli, F. Honarvar, A. Rahmani, 2010. Multi-fault diagnosis of ball bearing using intrinsic mode functions, Hilbert marginal spectrum and multi-class support vector machine, *International Conference on Mechanical and Electronics Engineering*, (2):145-149.
- Seryasat, O.R., M. Aliyari Shoorehdeli, F. Honarvar, A. Rahmani, 2010. Multi-fault diagnosis of ball bearing based on features extracted from time-domain and multi-class support vector machine (MSVM), *11th IEEE International Conference on Systems, Man, and Cybernetics*, 4300-4303.
- Seryasat, O.R., H. Ghayoumi Zadeh, M. Ghane, Z. Aboalizadeh, A. Taherkhani, F. Maleki, 2013. Fault Diagnosis of Ball-bearings Using Principal Component Analysis and Support-Vector Machine, *Life Science Journal*, 10(1s): 393-397.
- Seryasat, O.R., J. Haddadnia, Y. Arabnia, M. Zeinali, Z. Aboalizadeh, A. Taherkhani, S. Tabrizy, F. Maleki, 2012. Intelligent Fault Detection of Ball-bearings Using Artificial neural networks and Support-Vector Machine, *Life Science Journal*, 9(4): 4186-4189.
- Javad Haddadnia, Omid Rahmani Seryasat, Hamidreza Rabiee, 2014. Fault Detection of Induction Motor Ball Bearings, *Advances in Environmental Biology*, 8(6): 1802-1809.
- Seryasat, O.R., M. Habibi, M. Ghane, H. Taherkhani, 2014. Fault Detection of Rolling Bearings using Discrete Wavelet Transform and Neural Network of SVM, *Advances in Environmental Biology*, 8(6): 2175-2183.
- Rahmani, O. and A. Taherkhani, 2014. A method of data encryption in NOC, *Journal of Applied Science and Agriculture*, 9(4): 1903-1906.
- Javad Haddadnia, Omid Rahmani Seryasat, 2014. Classing images using words package model and fuzzy weighting of the words of the vocabulary, *Journal of Applied Science and Agriculture*, 9(10): 78-82.