

## ORIGINAL ARTICLES

### Ship Manoeuvring Assessment By Using Numerical Simulation Approach

<sup>1</sup>C.W. MOHD NOOR, <sup>1</sup>W.B. WAN NIK. and <sup>2</sup>M. MAMAT

<sup>1</sup>*Department of Maritime Technology.*

<sup>2</sup>*Department of Mathematics, Universiti Malaysia Terengganu.*

---

#### ABSTRACT

The development of high-speed computers has revolutionized the method used to predict the behaviour of complex systems and phenomena. One important prediction technique made feasible by high-speed computers is the time-domain simulation. Time-domain simulation was widely used in the marine field especially in the prediction of ship motions, sea-keeping and also manoeuvring. On the other hand International Maritime Organization (IMO) standard for ship manoeuvrability have hastened the need for more accurate prediction of ship's manoeuvrability at the early design stage. There are many test methods available for manoeuvring prediction such as free running and captive model tests. However these methods are expensive and time consuming. As an alternative, the numerical simulation method is taking place the current principal approach. This paper presents a manoeuvring assessment of an Offshore Supply Vessel (OSV) based on the numerical time domain simulation approach. Manoeuvring time domain simulation programmed was developed by using Matlab Simulink software. Prediction of vessel swept paths was obtained by double integration of an acceleration in the surge, sway and yaw axes. Simulation result shows that the manoeuvring criteria of an OSV comply with the IMO standard.

**Key words:** Manoeuvring assessment, Numerical simulation, Mathematical model.

---

#### Introduction

The development of high-speed computers has revolutionized the method used to predict the behaviour of complex systems and phenomena. One important prediction technique made feasible by high-speed computers is the time-domain simulation, in which behaviour of a system is determined by numerical integration of a set of equations of motions. Time-domain simulation was widely used in the marine field especially in the prediction of ship motions, sea-keeping and also manoeuvring for all types of ship and marine systems. These simulations used hydrodynamic coefficients based on prediction formulae or test data from captive model test conducted in a towing tank.

Simulation offers several significant advantages over computing techniques, such as free running model tests in order to assess vessel controllability and manoeuvring performance. The most important advantages of simulation are that once the initial model test is conducted and simulation model generated, almost any manoeuvre or ship operation can be simulated without additional model tests. The simulation model can be readily and economically modified to determine the effect of changes, such as increasing of rudder and propeller size.

The manoeuvring can be either of the fast-time or real-time type. Fast-time simulation is conducted using autopilot or pre-programmed control. The time required to conduct such simulation depends only on the complexity of the simulation model and the power of the computer. Fast-time simulations could provide a cost effective means for evaluating ship manoeuvrability, controllability and course keeping. Real-time simulations are conducted using a human operator or ship-handler. Some level of simulator will provide ship state data such as position, heading and velocity. This information made the control of the helm and engine order meaningful for the ship handler. The real-time decision-making provided by the ship - handler is essential for ship handling and waterway design studies.

The International Maritime Organization (IMO) MSC.137 (76) "Standards for Ship Manoeuvrability" required all ships to comply in order to ensure safe operation at sea. This standard provides criteria on the ship turning, yaw checking, course keeping and stopping ability. In order to comply with the IMO manoeuvring standards, the ability to predict ship manoeuvrability at design stage is essentially important.

There are several methods available to assess the manoeuvring criteria of a vessel such as sea trial, model test and numerical simulation method. However sea trial and model test are expensive and time consuming. As

an alternative, nowadays the numerical simulation method with parameters determined from a database is taking place the principal approach.


The objective of this study was to assess the manoeuvring characteristic of an Offshore Supply Vessel (OSV) by using a numerical approach time domain simulation programme. In general, low speed vessels with high block coefficient such as OSV are known to have bad manoeuvring characteristic because of the full hull form with small length to beam ratio (Lee H.Y., 1998).

*Imo Manoeuvring Standards:*

The problem of ship manoeuvrability has considerably grown in the last decade, both for merchant and naval ships. With regards to merchant ships, the Interim Standards of Ship Manoeuvrability A.751 (18) was adopted as IMO Resolution MSC.137 (76), “Standards for Ship Manoeuvrability” in 76<sup>th</sup> Marine Safety Committee meeting in December 2002. IMO enforced a minimum manoeuvrability criteria to ensure safety of all seagoing ships. These criteria are listed in Table 1 while the manoeuvring indices are shown in Figure 1.

**Table 1:** IMO evaluation criteria in final standards for ship manoeuvrability (International Maritime Organization 2002).

Item	Test	Criteria
Turning ability	Turning test with max. rudder angle (35°.)	Advance < 4.5L Tactical diameter < 5.0L
Initial turning Ability	10°/10° Z-test	Distance ship run before 2 <sup>nd</sup> rudder execution < 2.5L
Stopping ability	Stopping test with full astern	Track reach < 15L
Course-keeping and yaw-checking ability	10°/10° Z-test	1 <sup>st</sup> overshoot <10° (L/U<10s) <(5+0.5 L/U)° (10s<L/U<30s) <20° (30s<L/U)
		2 <sup>nd</sup> overshoot <25° (L/U<10s ) <(17.5+0.75(L/U))° (10s<L/U<30s) <40° (30s<L/U)
	20°/20° Z-test	1 <sup>st</sup> overshoot. < 25°

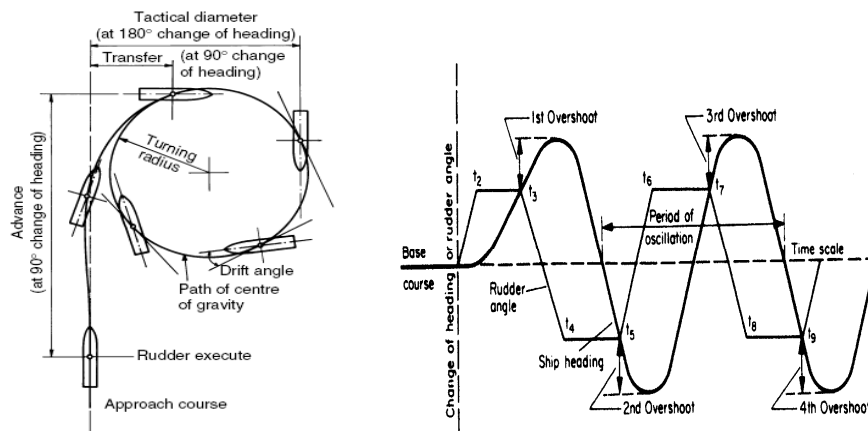


**Fig. 1:** Turning Ability and Zig-Zag Manoeuvring Indices (Lewis, E.V., 1989).

*Mathematical Model:*

The mathematical model for manoeuvring motion can be structured from the equations of motion with reference to the co-ordinate system, whose origin is the ship’s centre of gravity as shown in Figure 2. (*U*) is the actual ship velocity that can be resolved into advance velocity (*u*) and transversal velocity (*v*). The ship has also a rotation velocity with respect to the Z-axis. This axis is normal to the *XY* plane and passes through the ship centre of gravity (*CG*). (*β*) is the angle between (*U*) and the X-axis and it is called the drift angle. (*ψ*) is the ship heading angle and (*δ*) is the rudder angle. In this study, manoeuvrability was approached as a bi-dimensional phenomenon.

Two reference systems used, one of them fixed (*X<sub>o</sub>*, *Y<sub>o</sub>*) and the other moving with the ship, with its origin at the centre of gravity. Yaw motion is supposed to occur around this point. In the moving reference, X-axis is positive forward and Y-axis is positive starboard. For both systems, moving and fixed, angles are positive in the clockwise sense.

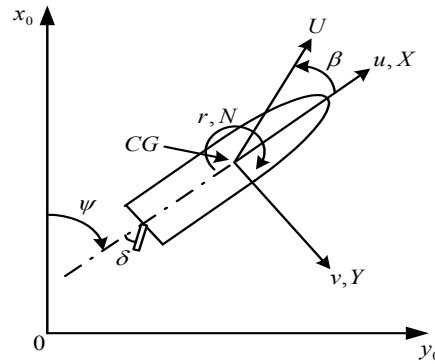

**Fig. 2:** Co-ordinate System.

*Equations of Motion:*

Once the reference systems have been defined, the ship is considered as a solid with three degrees of freedom: surge, sway and yaw. In accordance with these three degrees of freedom, the Newton's Second Law equation was applied to the moving reference system of Figure 2 for each motion (Kijima, K., 2003). Interrelating both axes and differentiating the Newtonian equations of motion, the dynamical model which governs the motion of the ship, can be simply written as follows:

$$\begin{cases} (m' + m'_x) \left( \frac{L}{U} \right) \left( \frac{\dot{U}}{U} \cos \beta - \dot{\beta} \sin \beta \right) + (m' + m'_y) r' \sin \beta = X' \\ -(m' + m'_y) \left( \frac{L}{U} \right) \left( \frac{\dot{U}}{U} \sin \beta - \dot{\beta} \cos \beta \right) + (m' + m'_x) r' \cos \beta = Y' \\ (I'_{zz} + J'_{zz}) \left( \frac{L}{U} \right)^2 \left( \frac{\dot{U}}{L} r' + \frac{U}{L} \dot{r}' \right) = N' \end{cases} \quad (1)$$

where:

- $X', Y'$  : Dimensionless surge and sway force acting on a ship,
- $N'$  : Dimensionless yaw moment acting on a ship,
- $m', m'_x, m'_y$ : Dimensionless mass of ship, and added mass in X and Y-directions,
- $I'_{zz}$  : Dimensionless moment of inertia of ship in Z-axis,
- $J'_{zz}$  : Dimensionless added moment of inertia of ship in Z-axis,
- $B$  : Drift angle at the center of gravity C.G. [ $\beta = -\sin^{-1}(v/U)$ ],
- $r'$  : Dimensionless turning rate [ $r = d\psi/dt$ ],
- $L, T, U$  : Ship length, draught and speed respectively.

The left hand-side of equations (1) represents the inertial terms. The right hand-side represents the external forces and moments that act on the ship. These forces and moments can be described separately into the following components:

$$\begin{cases} X' = X'_H + X'_R + X'_P \\ Y' = Y'_H + Y'_R \\ N' = N'_H + N'_R \end{cases} \quad (2)$$

The subscripts “*H*”, “*P*”, and “*R*” symbolize ship hull, propeller, and rudder respectively according to the concept of Mathematical Model Group (Kose K. 1982; Ogawa, A., 1978).

*Forces and Moments Acting on Hull:*

$X'_H, Y'_H$  and  $N'_H$  are approximated by the following polynomials in terms of  $\beta$  and  $r'$  at the amidships. The coefficients of the polynomials are called hydrodynamic derivatives. The longitudinal component of hydrodynamic force ( $X'_H$ ), the lateral force ( $Y'_H$ ), and yaw moment ( $N'_H$ ) acting on the ship hull are expressed as follows (Kijima, K., 2003):

$$\begin{aligned}
X'_H &= \{ X'_{\beta r} r' \sin\beta + X'_{uu} \cos^2\beta \} \\
Y'_H &= \{ Y'_{\beta\beta} + Y'_{rr} r' + Y'_{\beta\beta} \beta \} + Y'_{rr} r' |r'| + (Y'_{\beta\beta r} \beta + Y'_{\beta r r'}) \beta r' \} \\
N'_H &= \{ N'_{\beta\beta} + N'_{rr} r' + N'_{\beta\beta} \beta \} + N'_{rr} r' |r'| + (N'_{\beta\beta r} \beta + N'_{\beta r r'}) \beta r' \}
\end{aligned} \quad (3)$$

### 3.3 Forces and Moments Induced by Propeller

The hydrodynamic forces generated by the ship propeller are expressed in equation (4), neglecting lateral force and yaw moment that affects the stopping manoeuvre, (Kijima, K., 1990; Kijima, K. and Tanaka, S. 1993):

$$\begin{aligned}
X'_P &= [C_{tp} (1 - t_p) n^2 D_p^4 K_T (J_p)] / 0.5\rho L d U^2 \\
Y'_P &= 0 \\
N'_P &= 0 \\
K_T (J_p) &= C_1 + C_2 J_p + C_3 J_p^2 \\
J_p &= U \cos\beta (1 - w_p) / (n D_p)
\end{aligned} \quad (4)$$

where:

$t_p$  : Thrust reduction coefficient in straight forward moving,

$C_{tp}$ : Propeller constant,

$n$  : Propeller revolution,

$D_p$ : Propeller diameter,

$w_p$ : Effective wake fraction coefficient of propeller in straight running,

$K_T$ : Thrust coefficient of a propeller force,

$J_p$ : Advance coefficient,

$C_1, C_2, C_3$ : Constants for propeller open characteristics.

*Forces And Moments Induced By Rudder:*

The hydrodynamic forces generated by ship rudder are described in equation (5), in term of rudder normal force  $F'_N$ , rudder angle  $\delta$  and rudder-to-hull interaction coefficient  $t_R, a_H$  and  $x_H$ :

$$\begin{aligned}
X'_R &= - (1 - t_R) F'_N \sin\delta \\
Y'_R &= - (1 + a_H) F'_N \cos\delta \\
N'_R &= - (x_R + a_H x_H) F'_N \cos\delta
\end{aligned} \quad (5)$$

where:

$x_R$  : The distance of rudder from the ship centre of gravity,

$x_H$  : The distance between the ship centre of gravity and centre of lateral force,

$\delta$  : Rudder angle,

$F'_N$ : Dimensionless rudder normal force,

$t_R$  : Coefficient for additional drag,

$a_H$  : Ratio of additional lateral force.

The components of forces in the equation of motion were calculated corresponding to the prescribed manoeuvring motions. The vessel's swept path can be obtained by simulating the coefficients, which are obtained from the approximate formulae in the equation of motion. The swept path is then obtained by double integrating the acceleration of the vessel in the surge, sway and yaw axis of the mathematical model.

The equations in the system of the motion used in the simulation are described in the mathematical model in equation (1). The details of non-dimensional surge force ( $X'$ ) equation are as follows:

$$\left\{ (m' + m'_x) \left( \frac{L}{U} \right) \left( \frac{\dot{U}}{U} \cos\beta - \dot{\beta} \sin\beta \right) + (m' + m'_y) r' \sin\beta \right\} = X' \quad (6)$$

The equations (6) were rearranged in order to the set of acceleration. The set of accelerations (equation 7) needs to be double integrating to obtain velocities and finally displacements.

$$\dot{U} = \left[ \frac{X' - (m' + m'_y)r' \sin \beta}{(m' + m'_x)\left(\frac{L}{U}\right)} + \dot{\beta} \sin \beta \right] \frac{U}{\cos \beta} \quad (7)$$

The above set of equations (7) could be integrated by using the ordinary differential equation (ode) function as follows:

$$U = \int_{t_1}^{t_2} \left[ \frac{X' - (m' + m'_y)r' \sin \beta}{(m' + m'_x)\left(\frac{L}{U}\right)} + \dot{\beta} \sin \beta \right] \frac{U}{\cos \beta} dt \quad (8)$$


$$x = \int_{t_1}^{t_2} \int_{t_1}^{t_2} \left[ \frac{X' - (m' + m'_y)r' \sin \beta}{(m' + m'_x)\left(\frac{L}{U}\right)} + \dot{\beta} \sin \beta \right] \frac{U}{\cos \beta} dt \quad (9)$$

#### Simulation Program:

The software used in this study called MATLAB Simulink which the name stands for *Matrix Laboratory*. MATLAB is a high-performance language for technical computing. It integrates computation, visualization, and programming in an easy-to-use environment and user friendly where problems and solutions are expressed in familiar mathematical notation.

The Simulink feature is a software package for modelling, simulating, and analysing of dynamic systems. It supports linear and non-linear systems, modelled in continuous time, sampled time, or a hybrid of the two. Systems can also be multi-rate, i.e., have different parts that are sampled or updated at different rates. Simulink also provides a Graphical User Interface (GUI) that use various types of elements called blocks to create a simulation of a dynamic system which a system that can be modelled with differential or difference equations whose independent variable is time.

The simulation programme was written in graphical programming language and compiled using MATLAB Simulink compiler. The programmes are developed in three main blocks which are input block, process block and output block. The details of the programme flowchart are shown in Figure 3.

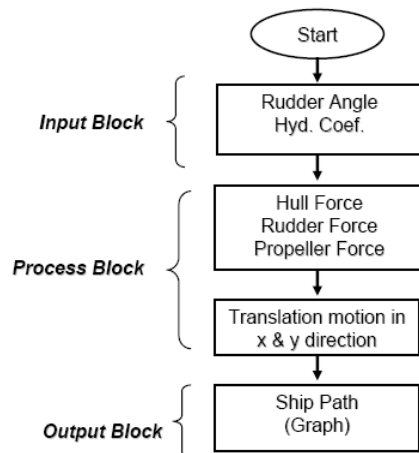

**Fig. 3:** Simulation programme flowchart.

In input block, the programme will read the input data of rudder angle and hydrodynamic coefficients. These input data will then be used in process block in order to calculate the hull, rudder and propeller forces. The layouts of the process block module are shown in Figure 4.

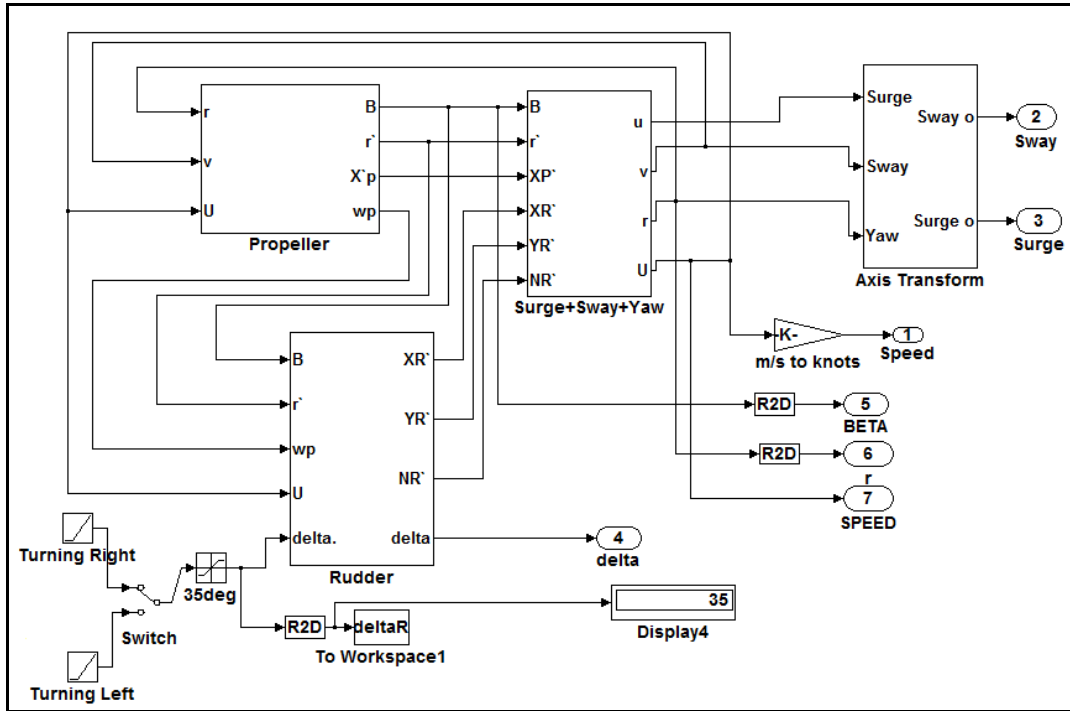


Fig. 4: Layout of process block.

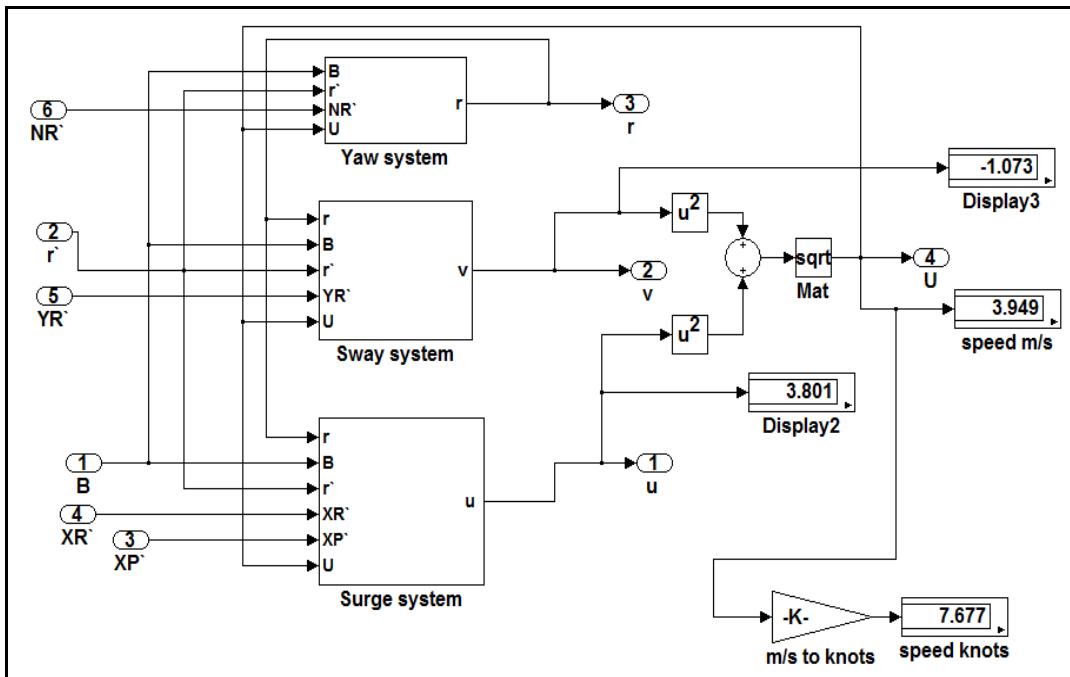


Fig. 5: Surge, sway and yaw sub-block.

Hull modules are divided into three sub-blocks which are called surge, sway and yaw sub-block. The details are shown in Figure 5. Propeller and rudder forces are calculated in their sub-block as shown in Figures 6 and 7, respectively.

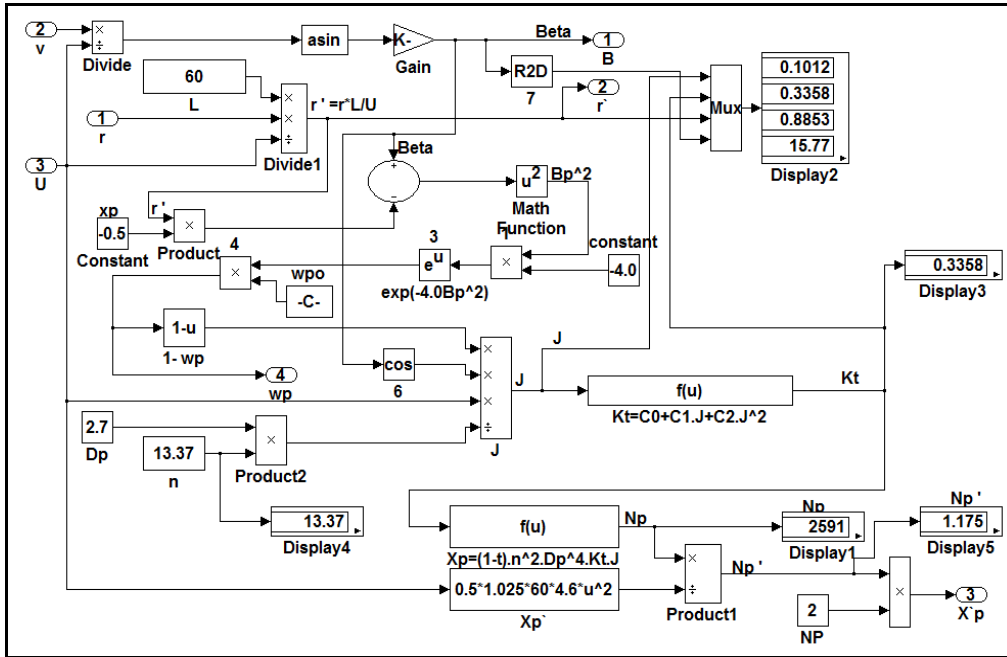


Fig. 6: Propeller sub-block.

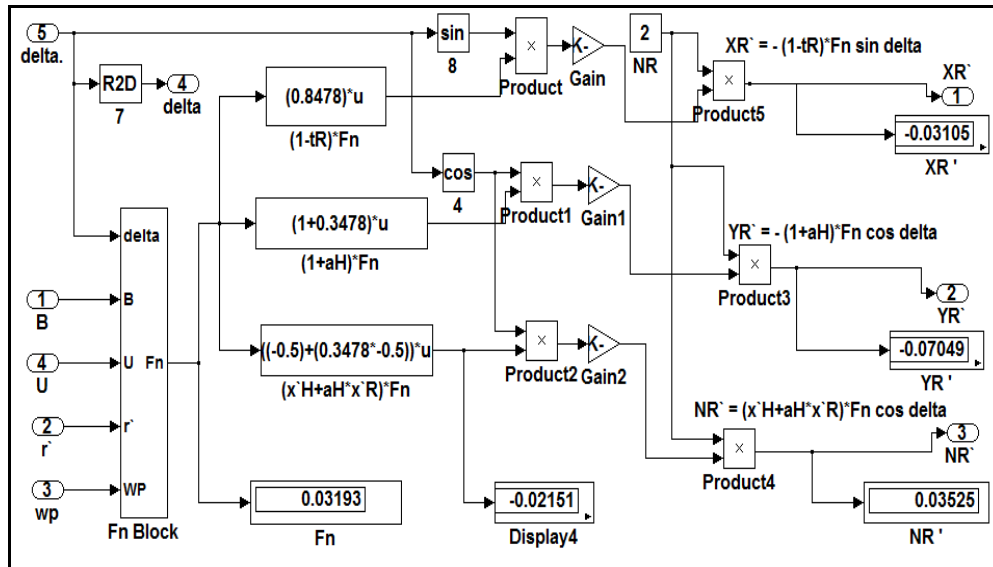


Fig. 7: Rudder sub-block.

The equation of motion will be double integrated to obtain the translation of motion in x and y directions. Lastly the output results of ship path are displayed in graphical form as shown in Figure 8.

Simulation Results:

Manoeuvring assessment in this study was limited to the Turning Circle and Zig-Zag criteria. Simulation for Turning Circle and Zig-Zag manoeuvre was run at constant ship speed of 12.5 knots and the propeller was assumed to be working ahead with constant speed. Equation of motion was double integrated to obtain the translation motion in X and Y-axis. The output results of the ship's path turning to port and starboard are displayed in graphical form as shown in Figure 9.

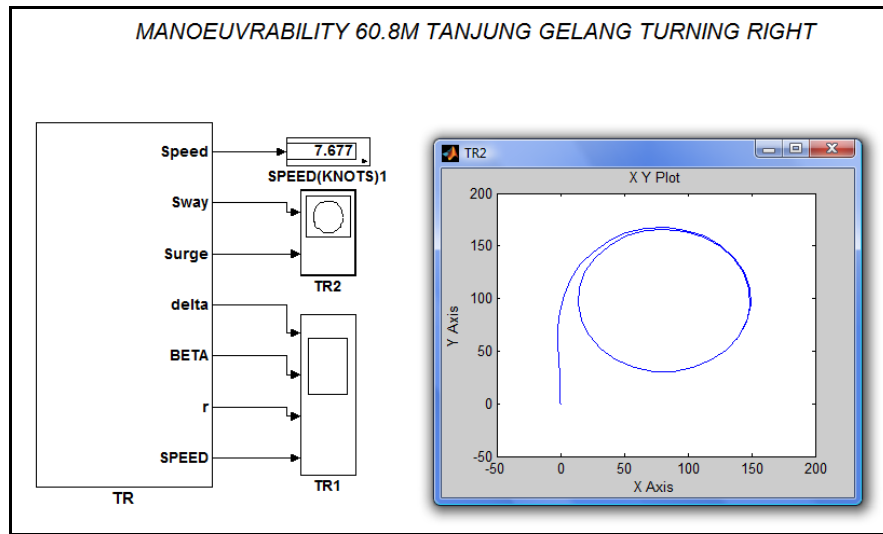


Fig. 8: Output result of ship path.

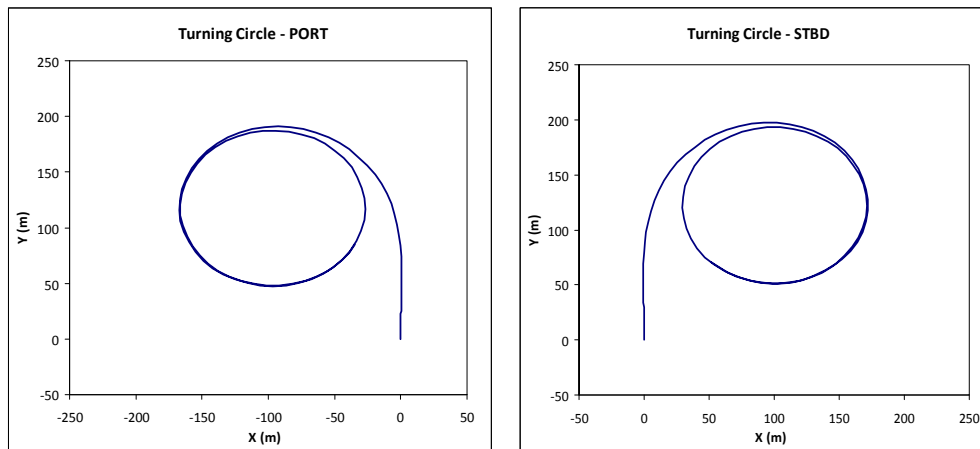


Fig. 9: Simulation results of turning circle trajectories to port and starboard.

Advance Distance ( $A_d$ ) and Tactical Diameter ( $T_d$ ) were measured and the summary is tabulated as in Table 2. The results show that both criteria found to comply with IMO standards. The turning manoeuvre is carried out to determine the turning ability and the response of the ship to the deflection of the rudder at  $35^\circ$  angle. On the other hand, the Zig-Zag manoeuvre was carried out for the purpose of yaw checking ability which represents the inherent effectiveness of the two rudders in making changes of ship heading. The simulation results of Zig-Zag 10/10 and Zig-Zag 20/20 are recorded in Table 3. It shows that the 1<sup>st</sup> and 2<sup>nd</sup> overshoot angle of Zig-Zag 10/10 and Zig-Zag 20/20 meets the IMO standard. This means that the OSV had a good yaw checking ability. The details of the simulated time histories for Zig-Zag manoeuvre are plotted in Figures 10 and 11, respectively.

Table 2: Simulation results of turning circle.

Parameter	Turning (port)	Turning (starboard)	IMO Criteria	Result
Advance distance	3.1 L (188m)	3.2 L (194m)	< 4.5 L	Comply
Tactical diameter	2.7 L (164m)	2.8 L (169m)	< 5.0 L	Comply

Table 3: Simulation results of Zig-Zag 10/10 and 20/20.

Parameter	Zig-Zag 10/10		Zig-Zag 20/20		Result
	Predict.	IMO	Predict.	IMO	
1 <sup>st</sup> overshoot (deg.)	6.5	10	15.7	25	Comply
2 <sup>nd</sup> overshoot (deg.)	10.6	25	23.6	-	Comply

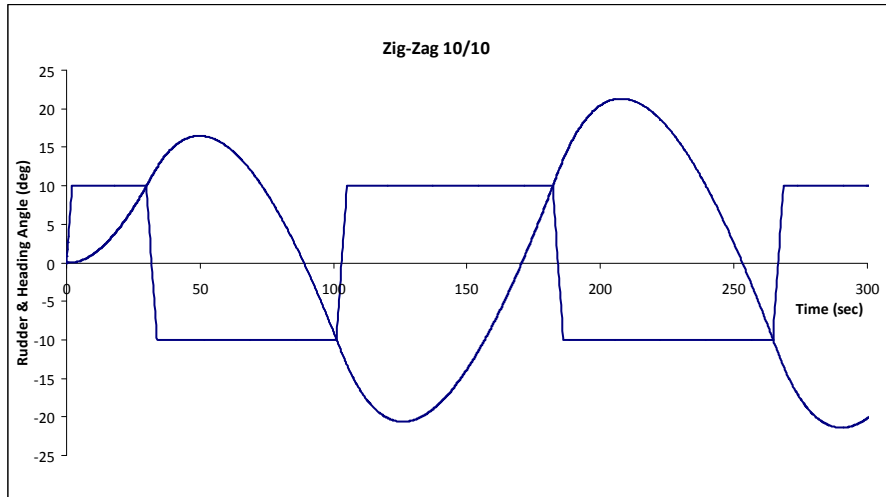


Fig. 10: Simulation time histories of Zig-Zag 10/10.

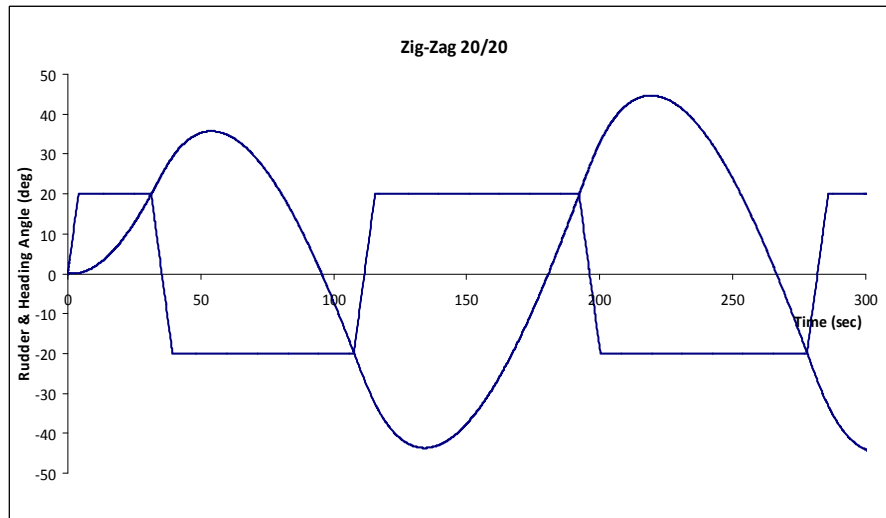


Fig. 11: Simulation time histories of Zig-Zag 20/20.

*Conclusion:*

Manoeuvring assessment of an Offshore Supply Vessel (OSV) was successfully performed by using numerical simulation methods which was developed based on Matlab Simulink software. Simulation results show that all manoeuvring characteristics of an OSV complies with the requirements stipulated by IMO resolution MSC.137 (76), International Maritime Organization standards for ship manoeuvrability. Numerical time domain simulation developed in this study is found suitable and can be used as a primary tool in order to access ship manoeuvring characteristic at early design stages. This method was considered as an economical and reliable ship manoeuvring assessment tool which can predict manoeuvring characteristic without relying on the model tests.

**References**

International Maritime Organization - *Standards for Ship Manoeuvrability, Report of The Maritime Safety Committee on its Seventy-Sixth Session-Annex 6 (Resolution MSC.137(76))*, London, UK: International Maritime Organization, 2002.

Kijima, K., *Some Study on the Prediction for Ship Manoeuvrability*, Proceeding of the International Conference of Ship Simulation and Ship Manoeuvrability, Kanazawa, Japan, 2003.

Kijima et al., 2002. *On The Prediction Method for Ship Manoeuvrability*, Proceeding of International Workshop on Ship Manoeuvrability, Hamburg Ship Model Basin, Germany, paper no 7.

- Kijima, K., N. Yasuaki and T. Masaki, 1990. *Prediction Method of Ship Manoeuvrability in Deep and Shallow Water*, Proceedings of the Marsim & ISCM 90 Conference., June 4-7, Tokyo, Japan, pp: 311-318.
- Kijima, K. and S. Tanaka, 1993. *On the prediction of ship manoeuvrability characteristics*, Proceeding of the International Conference of Ship Simulation and Ship Manoeuvrability, London, pp: 285-294.
- Kose, K., 1982. *On a New Mathematical Model of Manoeuvring Motions of a Ship and its Applications*, International Shipbuilding Progress, Rotterdam, Netherlands, 29(336): 205-220.
- Kose, K., W.A. Misiag, 1993. *A Systematic Procedure for Predicting Manoeuvring Performance*, MARSIM 93, Canada, pp: 535-545.
- Lee, H.Y., S.S. Shin, 1998. *The Prediction of Ship's Manoeuvring Performance in Initial Design Stage*, Hyundai Maritime Research Institute, R&D Division, HHI, Ulsan, Korea, pp: 633-639.
- Lewis, E.V., 1989. ed. - *Principles of Naval Architecture, Volume 3*, Jersey City, USA: SNAME, pp: 206-209.
- Ogawa, A., H. Kasai, 1978. *On The Mathematical Model of Manoeuvring Motion of Ship*, ISP, 25(292): 306-319.